
# Cleaning Care for Your Flycast Reel (2007 Model)

## CLEANING INSTRUCTIONS FOR YOUR FLYCAST REEL (2007)

The Flycast series is fully coated, making it ideal for use in most fishing conditions.

When cleaning the reel, the drag should be fully disengaged – Drag Knob (27) rotated counterclockwise until the stopping position is reached. Use fresh water to flush debris from the drag system. For better cleaning results, separate the spool from the frame, soak in warm fresh water and then rinse in fresh running water. Complete dry the spool and the frame and then re-lubricate the Spindle (7) with petroleum grease before storing the reel.

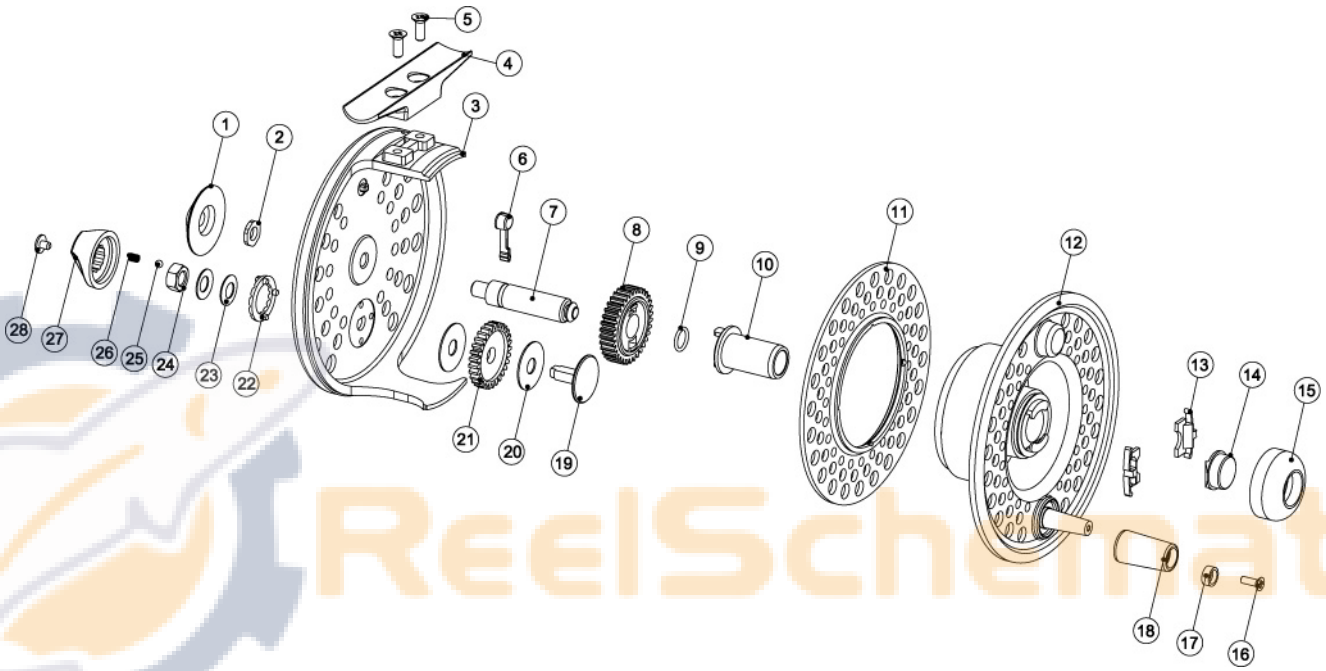


ReelSchematic

| | | | |
|---|---|---|---|
| 1 | SPINDLE COVER | 15 | SPOOL CAP |
| 2 | SPINDLE NUT | 16 | HANDLE RETAINING SCREW |
| 3 | BODY | 17 | RETAINER |
| 4 | FOOT | 18 | HANDLE |
| 5 | FOOT SCREWS | 19 | DRAG SPINDLE |
| 6 | CLICKER | 20 | DRAG WASHER |
| 7 | SPINDLE | 21 | DRAG GEAR |
| 8 | DRIVE GEAR ASSEMBLY | 22 | DRAG CLICK PLATE |
| 9 | O-RING | 23 | DISC SPRING |
| 10 | SPOOL BEARING | 24 | DRAG NUT |
| 11 | SPOOL REAR | 25 | DRAG CLICK BALL |
| 12 | SPOOL | 26 | CLICK SPRING |
| 13 | SPOOL RELEASE SLIDE | 27 | DRAG KNOB |
| 14 | SPOOL RELEASE BUTTON | 28 | DRAG KNOB SCREW |

ALL PRODUCTS AND CONTENT ©2005-2006 ROSS REELS WORLDWIDE. ALL RIGHTS RESERVED.