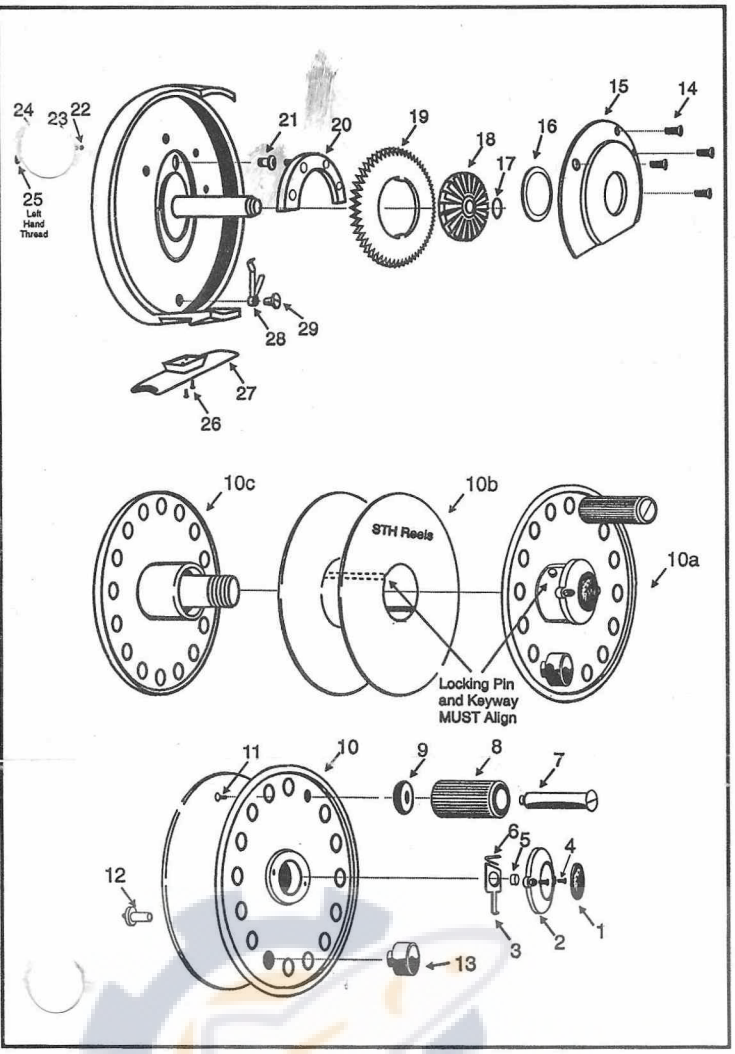


CR - CASSETTE REELS® PARTS LIST

1. STH Medallion
2. Retainer
3. Retainer Clip
4. Stainless Steel Screws (2)
5. Spacer
6. Retainer Spring
7. Handle Fastener
8. Handle
9. Spacer
10. Spool Housing
10a. Front Flange of Spool
10b. Cassette
10c. Rear Flange of Spool
11. Handle Fastener Screw
12. Stop Pin Assy.
13. Counter Weight
14. Disk Drag Cover Retainer Screws
15. Disk Drag Cover
16. Teflon Drag Pad
17. O Ring
18. Reversible Disk Gear
19. Disk
20. Drag Pad
21. Splined Worm Gear
22. Drag Adjustment Knob Bearing
23. Drag Adjustment Knob Spring
24. Drag Adjustment Knob
25. Drag Adj. Knob Screw (L.H. Thread)
26. Foot Fasteners
27. Reel Foot
28. Clicker Spring
29. Clicker Spring Post

OWNER'S MANUAL
CR - CASSETTE REELS®

Please take a few minutes to read through this Owner's Manual.

DRAG ADJUSTMENT

The Drag on the Cassette Reel features cork and teflon against stainless steel. Just turn the knob to increase or decrease pressure.

TO REMOVE SPOOL

Just push release lever toward handle. (Release lever is located near center of reel next to counterweight. See picture below.) Then pull spool from reel.

RIGHT OR LEFT HAND CONVERSION

To change to right or left hand use, just follow these steps:

1) Remove spool.
2) Lift center gear out of disk and remove from shaft.
3) Flip center gear and replace on shaft.
4) Make certain that keyways on center gear match up with slots on disk.
5) Replace spool and go fishing.

TO CHANGE CASSETTE

1) Remove spool from reel.
2) Grasp front flange with left hand and UNSCREW rear flange counter-clockwise.
3) Remove cassette from spool.
4) Replace cassette (RH facing out for right-hand wind – LH facing out for left-hand wind).
5) Screw rear flange onto spool. Tighten firmly.
6) Replace spool on reel.

Figure A


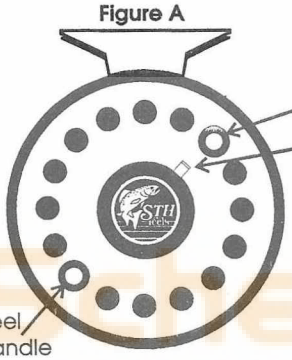


Figure B

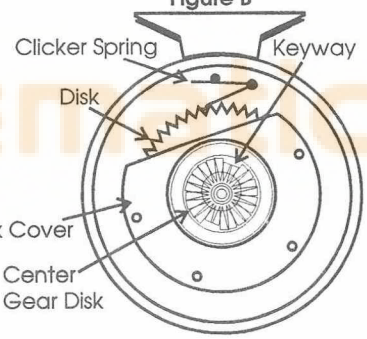

STH REELS (USA) INC.
P.O. Box 500816
Marathon, Florida 33050-0816
Phone (305) 743-5971
Fax (305) 743-3519

Steelhead Argentina S. R. L.
STH REELS
Peru 447
(1067) Buenos Aires
Republica Argentina