
SUPER SERIES

PRODUCT CARE



CHANGING THE DIRECTION OF RETRIEVE

1. Remove the spool (2) from the frame (1) by unscrewing the drag knob (6).
2. Next unscrew the Phillips-head screws counter clockwise from the pawls (4), and flip the pawls over to the opposite. direction.
3. Place the Phillips-head screws back into the pawls (4), and rotate pawls clockwise into the pawl screws holes on the frame (1). Screw them down tight, but not to the point that the pawls (4) bind in place on the frame (1). The pawls should bounce up and down freely into the drag plate teeth (3).
4. Replace the spool (2), and rotate the drag knob (6) clockwise until it engages the frame.

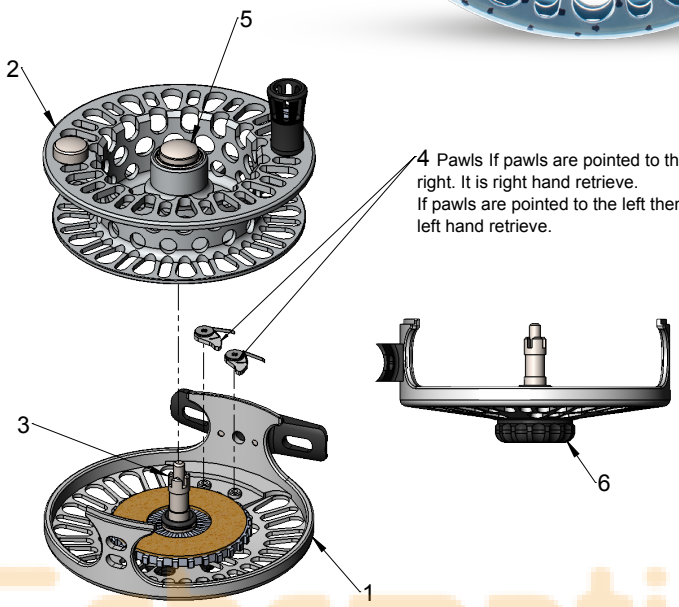

ReelSchematic

SPECIFICATIONS

All capacity numbers are in yards. Line capacities are based on 90- foot floating fly lines and 20# backing. All numbers are conservative, as capacities will vary according to specific length and diameters of alternative line manufacturers' products. Capacities will be reduced by approximately 20% if using #30 backing instead of #20 backing.

SUPER 4/5	
ARBOR OPTION	LARGE
WEIGHT	5.92 oz.
SPOOL DIAMETER	3.300
SPOOL WIDTH	0.800
HUB DIAMETER	1.900
LINE + YARDS OF BACKING	4 + 105 20# 5 + 80 20#

SUPER 5/6	
ARBOR OPTION	LARGE
WEIGHT	6.23 oz.
SPOOL DIAMETER	3.650
SPOOL WIDTH	0.825
HUB DIAMETER	2.315
LINE + YARDS OF BACKING	5 + 120 20# 6 + 95 20#

SUPER 6/7	
ARBOR OPTION	LARGE
WEIGHT	6.56 oz.
SPOOL DIAMETER	3.775
SPOOL WIDTH	0.850
HUB DIAMETER	2.375
LINE + YARDS OF BACKING	6 + 145 20# 7 + 120 20#

SUPER 7/8	
ARBOR OPTION	LARGE
WEIGHT	6.74 oz.
SPOOL DIAMETER	3.900
SPOOL WIDTH	0.915
HUB DIAMETER	2.375
LINE + YARDS OF BACKING	7 + 225 20# 8 + 200 20#

SUPER 9/10	
ARBOR OPTION	LARGE
WEIGHT	8.00 oz.
SPOOL DIAMETER	4.220
SPOOL WIDTH	0.975
HUB DIAMETER	2.550
LINE + YARDS OF BACKING	9 + 320 20# 10 + 295 20#

SUPER 11/12	
ARBOR OPTION	LARGE
WEIGHT	10.05 oz.
SPOOL DIAMETER	4.700
SPOOL WIDTH	1.075
HUB DIAMETER	2.600
LINE + YARDS OF BACKING	11 + 300 20# 12 + 275 20#

SUPER 12W	
ARBOR OPTION	LARGE
WEIGHT	10.06 oz.
SPOOL DIAMETER	4.700
SPOOL WIDTH	1.250
HUB DIAMETER	2.600
LINE + YARDS OF BACKING	11 + 440 20# 12 + 415 20#

CLEANING

While the Super Series is fully anodized to protect against corrosion and the elements, we recommend that you clean your reel after each use, especially after exposure to a salt or alkali environment. Use fresh water (distilled is preferred) to flush salt and debris from the reel. For better cleaning results, separate the Spool (2) from the Frame (1), soak both in warm, fresh water (again, distilled is preferred) and then rinse in fresh running water. If the outgoing drag on the reel does not feel as smooth as its initial use, or creates a slightly audible squeaking sound then apply a thin layer of neat's-foot oil to the drag surface, and smooth it in with your fingertips. Wipe off excess oil with a clean towel. This process may only need to take place once every several years with heavy use on the water. Let the Spool (2) and the Frame (1) dry completely before putting together and storing. We recommend allowing them to air dry with both the face of the spool (front) and the drag-knob-side of the frame facing up on a towel.