

Key	Part	Description	Key	Part	Description
1	R6E2	Spindle Screw Set	13	R7M1	Drag Pawl Rivet
2	R7F1	Handle-plate Lock Nut	14	R5H1	Drag Lever Spring
3	R4F4	Handle Assembly	15	R5G3-LH	Drag Pawl Spring
4	R7E6	Handle-plate Assy	16	R7J1-LH	Drag Pawl
5	R7D3	Drag Tension Star	17	R5E5	Ratchet Assembly
6	R7B/C4	Drag Washer Set	18	R5C1	Drag Lever & Rivet
7	R4A-500	Spool Only	19	R7K1	Drag Knob & Wheel
8	R7L3	Not on LH	20	R6F1	Hex Nut
9	R5B3	Fish Alert Wheel	21	R2G6	Base Lock Spring
10	R7A2-LH	Friction Tube	22	R2DEF1	Base Bolt Assembly
11	R6A10	Spindle	23	R2H1	Lever & Rivet
12	R6J1	Spindle Washer	24	R2A1-LH	Index Plate Assembly



# 50C-LH



CONGRATULATIONS and thank you for purchasing one of our Australian made star drag reels as your choice of fishing reel. These reels are constructed from the highest quality materials to ensure your reel will last for many years.

**Plus, all these other advantages -**

**Long, accurate casts:**  
Now, with only the minimum of practise you will be able to cast further and more accurately than ever before.

**Control large fish with ease:** Powerful one-to-one wind means you only need about a quarter of the effort required to lift a similar weight on a spinning reel.

**You can fish harder and longer:** Simple, rugged construction means you can forget that fiddly maintenance, because your Alvey reel will resist the effects of saltwater and sand.

## Special Features

- Star Drag
- Stainless Steel Back
- Multi-plate Clutch
- Silent Drag
- Fibreglass Spool
- Large Line Capacity

**More comfortable fishing:**

Low winch-mount rods let you fish with your arms in a relaxed position.

**No line twist:** Use a small free-running swivel as the last piece in any rig and you'll minimise any line twist. (See illustrations inside)



**Alvey 10 Year Guarantee:**

Any faulty Alvey part or reel will be replaced at no charge providing the manufacturer finds the part or reel has had normal usage and attention.

Reel Icon Pty Ltd Trading as  
Alvey Reels Australia ABN 57 625 261 707  
2-6 Antimony Street Carole Park Qld 4300  
t: +61 7 3271 2844 f: +61 7 3271 2451

For more hints and tips on maintenance,  
please visit the **spare parts** page at  
**www.alvey.com.au**  
e: info@alvey.com.au  
**#alveyreels**

## Recommended Line Size

Your 50C-LH reel will hold approximately 500 metres of 5 kg line. If fishing near rocks or other hazards use heavier line to help avoid line breakage.


## Filling the Spool with Line

Always take the line from the front of the dispenser, never the side. Wind firmly and evenly onto the spool, spreading the line with your fingers to give a smooth casting base.

Never stretch a nylon monofilament onto a spool; when it goes back to its original length it will exert strong enough crushing action to damage your spool.

Never allow loose coils to develop on your spool through careless uneven winding.

Adopt the habit of applying light finger tension when retrieving line and spread evenly over its bed.



## Selecting a Rod


Your rod and reel outfit should be balanced so you can hold it comfortably over long periods. A matched set, which has a point of balance where it's held in the left hand, will give you the most comfortable posture.

The ideal rod for this reel should be 2.5 to 3.0m in length.

The use of a short butt brings the reel into a natural position for rewinding with your elbows at your side and without strain.


## The Simple method for LONG DISTANCE SURF CASTING With the world's best side-cast reel – ALVEY!

1. To begin, place fingers of left hand on spool lip and thumb on release lever. Press lever... turn spool




2. Turn spool a full quarter to open-face casting position.


3. Release line from open runner. Restrain line with thumb on spool.




4. Casting position: Arms high rod held over shoulders, reel above rod.



5. Casting action: Punch hard with right hand, pull downward with left hand.




6. Casting drive: Follow through while releasing line grip as power is applied. Rod butt must clear left leg.




7. End of cast: Trap line at reel base. Turn drum back to fishing position.



8. Return line to open runner.



9 & 10 A comfortable fishing position makes hooking, playing or landing a fish more efficient.



# If you're left-handed simply carry out above instructions the other way round.


## Rigs & Swivels

When used properly a brass swivel is a very inexpensive and efficient way to keep a fishing line in good condition. Curls and twists in a line can be caused by many things, but can be kept to a minimum by the correct use of a swivel

## Swivel Sizes

Line breaking strain	Swivel size
1 – 5 kg	No 14
5 – 8 kg	No 12
8 – 15 kg	No 10
15 – 20 kg	No 9

Swivel must be above sinker

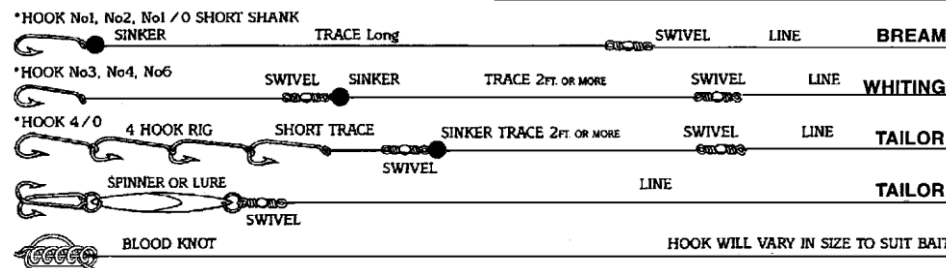

50C-LH



## Non-Reversing Drag Models

The non-reverse series of reels allows line to be released under a pre-set pressure while the reel handle remains in a stationary position. The position of the star on the front of the reel allows easy adjustment while playing a fish.

## Playing the fish

Once the fish has been hooked always keep a bend in the rod by holding it at an angle to the fish. With the power of an Alvey reel you are in control. Do not rush the fish. Allow the drag to tire the fish. Many times the fish is lost in the shore break. Keep a steady tension on your line, a bend in the rod and ease the fish ashore.

## Fish Alert

When leaving the rod and reel unattended, activate the fish alert on the back of the reel. If a fish takes line a warning noise will be heard.

## Setting the Drag

Using a small spring balance, pull the line off the reel. Set the tension of the drag to be approximately one third of the breaking strain of your line by rotating the drag tensioning star on the front of the reel. (Clockwise to increase tension.)

It is better to have the drag set light as a short sharp run from a large fish could snap the line on an over set drag. The star is easily adjusted while fighting the fish, and the unique style of the Alvey reel allows extra drag pressure to be applied directly to the spool by using the palm of your hand against the bottom of the reel.

## Maintenance

To lubricate your reel, remove the spindle screw and put 4 to 5 drops of light machine oil down the hole. Then lightly oil the handle, index mechanism and drag pawl.

After each day of fishing relieve the drag tension, wash off salt and sand and lubricate as above before storage.