

| Key | Part | Description | Key | Part | Description |
|-----|---------|-----------------------|-----|--------|----------------------|
| 1 | R6E4 | Spindle Screw Set | 13 | R7H1 | Drag Lever Spring |
| 2 | R7F2 | Handle-plate Lock Nut | 14 | R5G3 | Drag Pawl Spring |
| 3 | R7E27 | Handle-plate Assy | 15 | R7J4 | Drag Pawl |
| 4 | R7D16 | Drag Wheel | 16 | R5E6 | Ratchet Assembly |
| 5 | R7B/C26 | Friction Washer Set | 17 | R7K2 | Drag Knob & Wheel |
| 6 | R4A | Spool Only | 18 | R5C2 | Drag Lever & Rivet |
| 7 | R7L3 | Silent Drag Cam | 19 | R6F3 | Dome Nut |
| 8 | R5B5 | Fish Alert Wheel | 20 | R2G10 | Base Lock Spring |
| 9 | R7H1 | Friction Tube Washer | 21 | R2DEF2 | Base Bolt Assembly |
| 10 | R7A10 | Friction Tube | 22 | R2H2 | Lever & Rivet |
| 11 | R6A11 | Spindle | 23 | R2A2 | Index Plate Assembly |
| 12 | R6J6 | Spindle Washer | 24 | R1A | Back Assembly |



65VCX



CONGRATULATIONS and thank you for purchasing one of our Australian made signature alloy reels as your choice of fishing reel. These reels are constructed from the highest quality materials to ensure your reel will last for many years.

Plus, all these other advantages -

Long, accurate casts: Now, with only the minimum of practice you will be able to cast further and more accurately than ever before.

Control large fish with ease: Powerful one-to-one direct wind means you only need about a quarter of the effort required to lift a similar weight on a spinning reel.

You can fish harder and longer: Simple, rugged construction means you can forget that fiddly maintenance, because your Alvey reel will resist the effects of saltwater and sand.

Special Features

- Vented Alloy Spool
- Rapid Retrieve Handle Plate
- Oversize Single Carbon Drag Washer
- On/Off Drag Switch
- Stainless Steel Back

More comfortable fishing: Low winch-mount rods let you fish with your arms in a relaxed position.

No line twist: Use a small free-running swivel as the last piece in any rig and you'll minimise any line twist. (See illustrations inside)



Care Instructions

The Aluminium spool is well anodized but we recommend a thorough wash in fresh water after use in salt water.

Reel Icon Pty Ltd Trading as
Alvey Reels Australia ABN 57 625 261 707
2-6 Antimony Street Carole Park Qld 4300
t: +61 7 3271 2844 f: +61 7 3271 2451

For more hints and tips on maintenance,
please visit the **spare parts** page at
www.alvey.com.au
e: info@alvey.com.au
#alveyreels

Recommended Line Size

Your 65VCX reel will hold approximately 600 metres of 9 kg line. If fishing near rocks or other hazards use heavier line to help avoid line breakage.

Filling the Spool with Line


Always take the line from the front of the dispenser, never the side.

Wind firmly and evenly onto the spool, spreading the line with your fingers to give a smooth casting base.

Never stretch a nylon monofilament onto a spool; when it goes back to its original length it will exert strong enough crushing action to damage your spool.

Never allow loose coils to develop on your spool through careless uneven winding.

Adopt the habit of applying light finger tension when retrieving line and spread evenly over its bed.

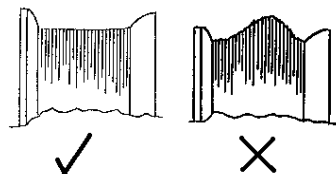


Selecting a Rod

Your rod and reel outfit should be balanced so you can hold it comfortably over long periods. A matched set, which has a point of balance where it's held in the left hand, will give you the most comfortable posture. The ideal rod for this reel should be 3.3 to 4.4m in length.

The use of a short butt brings the reel into a natural position for rewinding with your elbows at your side and without strain.


The Simple method for LONG DISTANCE SURF CASTING With the world's best side-cast reel – ALVEY!

1. To begin, place fingers of left hand on spool lip and thumb on release lever. Press lever... turn spool



2. Turn spool a full quarter to open-face casting position.


3. Release line from open runner. Restrain line with thumb on spool.




4. Casting position: Arms high rod held over shoulders, reel above rod.



5. Casting action: Punch hard with right hand, pull downward with left hand.




6. Casting drive: Follow through while releasing line grip as power is applied. Rod butt must clear left leg.



7. End of cast: Trap line at reel base. Turn drum back to fishing position.



8. Return line to open runner.



9 & 10 A comfortable fishing position makes hooking, playing or landing a fish more efficient.



If you're left-handed simply carry out above instructions the other way round.


Rigs & Swivels

When used properly a brass swivel is a very inexpensive and efficient way to keep a fishing line in good condition. Curls and twists in a line can be caused by many things, but can be kept to a minimum by the correct use of a swivel

Swivel Sizes

| Line breaking strain | Swivel size |
|----------------------|-------------|
| 1 – 5 kg | No 14 |
| 5 – 8 kg | No 12 |
| 8 – 15 kg | No 10 |
| 15 – 20 kg | No 9 |

Swivel must be above sinker

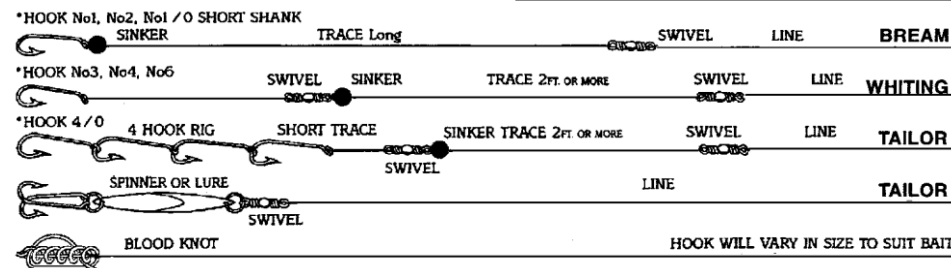

65VCX



Non-Reversing Drag Models

The non-reverse series of reels allows line to be released under a pre-set pressure while the reel handle remains in a stationary position. The Alloy models incorporate the new *Carbon Fibre Washer* that improves the range and smoothness of tension settings available.

Rapid Retrieve Handle-plate

The outer handle provides maximum winding power at 1:1 ratio to turn and control large fish. The inner handle is designed to give up to a 35% increase in your retrieve rate, for running a lure or recovering your rig quickly if you lose the bait.

Playing the fish

Once the fish has been hooked always keep a bend in the rod by holding it at an angle to the fish. With the power of an Alvey reel you are in control. Do not rush the fish. Allow the drag to tire the fish. Many times the fish is lost in the shore break. Keep a steady tension on your line, a bend in the rod and ease the fish ashore.

Fish Alert

When leaving the rod and reel unattended, activate the fish alert on the back of the reel by moving the button into the on position. If a fish takes line a warning noise will be heard.

Setting the Drag

Make sure the drag activating lever on the back of the reel is in the 'On' position. Using a small spring balance to pull the line off the reel. Set the tension of the drag to be approximately one third of the breaking strain of your line by rotating the drag wheel on the front of the reel. (Clockwise to increase tension.) It is better to have the drag set light as a short sharp run from a large fish could snap the line on an over set drag. The drag wheel is easily adjusted while fighting the fish and the unique style of the Alvey reel allows extra drag pressure to be applied directly to the spool by using the palm of your hand against the bottom of the reel.

Maintenance

Use a light machine oil for working spindles etc. Then oil the handle, index mechanism and drag pawl. After each day of fishing relieve the drag tension, wash off salt and sand and lubricate as above before storage.