CLAM™ MODEL 1060 PORTABLE ICE SHELTER

Item 8844

Height: 6' 6”
Length: 6'
Width: 10'
Weight: 82 lbs.



CONGRATULATIONS ON YOUR RECENT PURCHASE OF A CLAM PORTABLE ICE SHELTER! THE FOLLOWING INFORMATION IS INCLUDED IN THIS BOOKLET:

- Safety Instructions
- Parts List
- Assembly Instructions
- Tips for Use
- Maintenance and Care Instructions

Clam Corporation, Inc.
15600 28th Avenue North
Minneapolis, MN 55447
Phone: 763-231-4120
Fax: 763-231-4121
Customer service hours:
9am – 4pm, M-F, central time
Email: customerservice@clamcorp.com

Save this instruction booklet for future reference.

Part No. 101528

© Clam Corporation, Inc.

SAFETY INSTRUCTIONS

Please fully understand and follow all safety instructions outlined in this booklet. Failure to do so could result in severe injury.

- Do not use open flame heaters in your ice shelter. Open vents for cross ventilation.
- Ice Armor fabric will melt when contact is made with hot surfaces (i.e., heaters).
- Never leave shelter unattended when set up.
- Due to the increase in traffic (snowmobiles, autos, etc.) on area lakes, ice fishing can be hazardous at night. If you choose to fish at night or in poor visibility conditions, be sure to take precautions with lights or reflectors to show drivers your whereabouts.

⚠ WARNING

Death from Asphyxiation may result from use of oxygen depleting heaters. Open all vents for fresh air ventilation.

Injury or death may result from fire if tent fabric is exposed to open flame.

Tent fabric is not fireproof. Fabric will burn with extended exposure to open flame. Do not use open flame products inside tent. Tent fabric is treated with fire retardant. Application of any foreign substance may render the flame retardant properties ineffective.

Night time: exterior reflectors must be visible to reduce risk of collisions.


This tent is made with flame resistant fabric which meets CPAI-84 specifications.

CLAM 1060 PARTS LIST

If you need replacement parts, contact Clam Corporation's Customer Service at 763-231-4120 or customerservice@clamcorp.com. Customer service hours: 9am – 4pm, weekdays, central time.

ITEM #	DESCRIPTION	QTY.	PART NO.
1	CLAM FLOOR 60 X 32	2	101231
2	CLAM CENTER 60 X 9	1	101161
3	NUT, KEPS	8	101191
4	NUT, NYLOCK	10	101163
5	SIDE TUBE	4	101213
6	CAP, TUBE SPACER	4	101083
7	SPREADER TUBE	2	101220
8	WALL TUBE	2	101224
9	A SUPPORT BRACE	2	101197
10	B SUPPORT BRACE	2	101192
11	SCREW, 3/4" HI-LO	4	101212
12	TENT	1	101446
13	LANYARD, 8"	4	101228
14	DETENT PIN, 1/4" X 1"	4	101229
15	SCREW, 2"	4	101230
16	SPREADER TUBE	2	101186
17	DOME POLE	1	101182
18	BOLT, CARRIAGE 1/2"	8	101209
19	LATCH, RUBBER W/PIN	2	101203
20	SCREW, 1-1/2" TRUSS HEAD	2	101208
21	ROPE, 9'	1	101095
22	ROPE, 3/8 X 20" BRAIDED POLY	2	101200
23	STAPLE, 1-1/2"	6	101210
24	HOOP TUBE	2	101232
25	SQUARE POLE	4	101178
26	ROUND POLE	4	101174
27	BOLT, 1-3/4"	4	101211
28	STRAP ATTACHMENT	6	101202
29	WASHER, 1"	6	101206
30	SCREW, 3/4"	6	101207
31	LICENSE HOLDER	1	101135


PARTS IDENTIFICATION (Parts on this page are NOT actual size.)

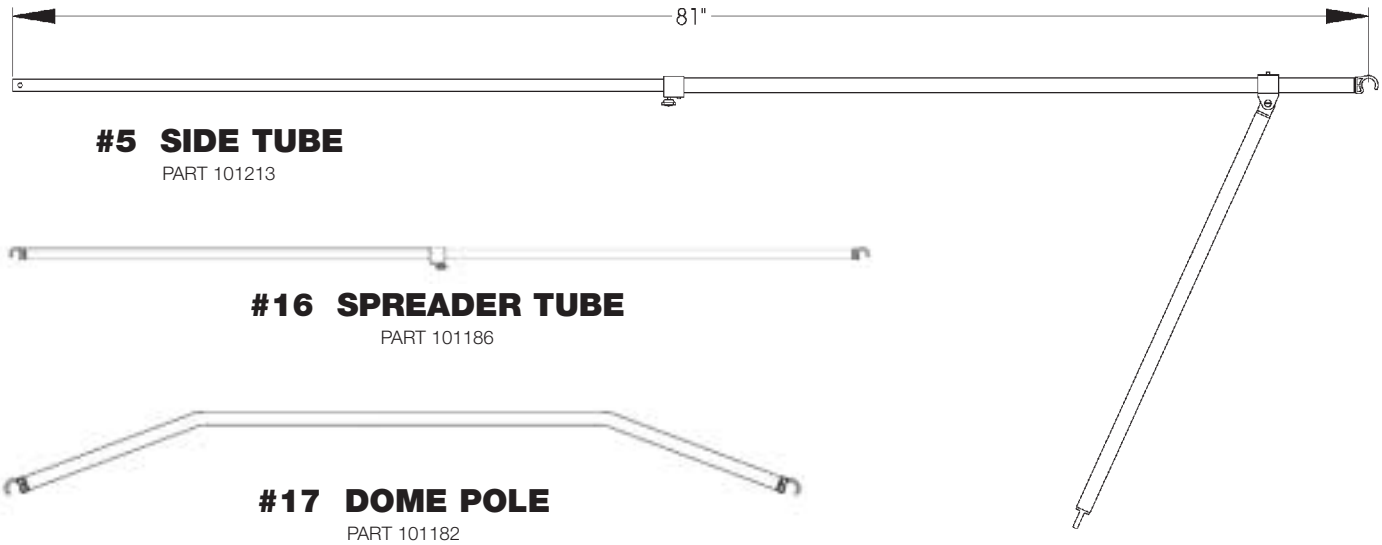


#5 SIDE TUBE
PART 101213

#16 SPREADER TUBE
PART 101186


#17 DOME POLE
PART 101182

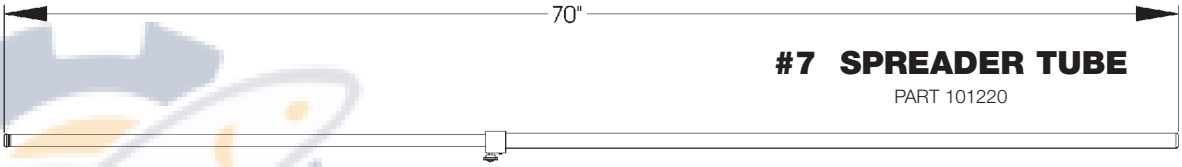


#7 SPREADER TUBE
PART 101220

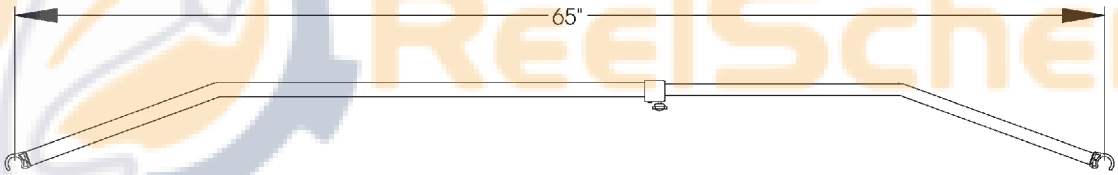


#8 WALL TUBE
PART 101224

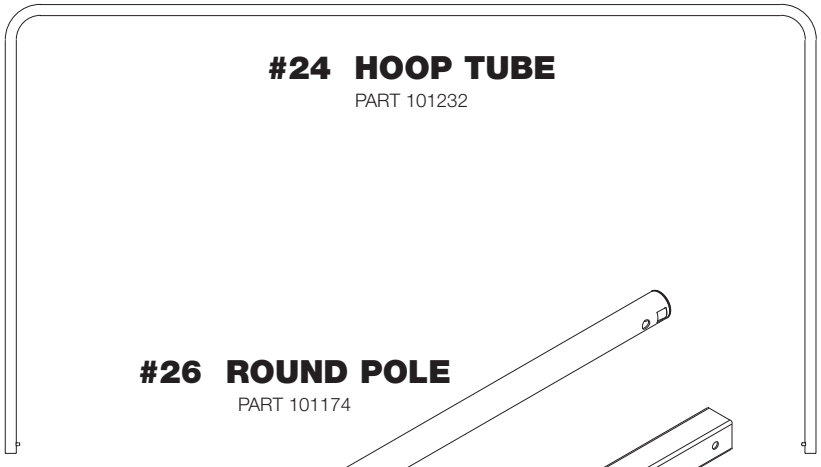


#24 HOOP TUBE
PART 101232

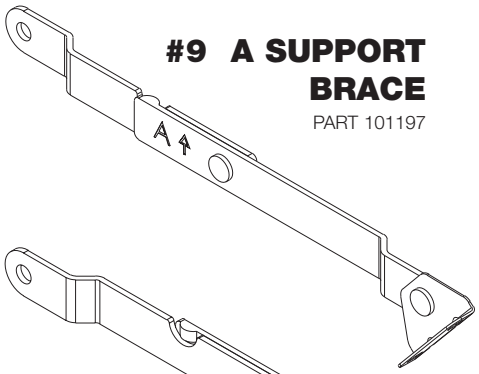

#9 A SUPPORT BRACE
PART 101197

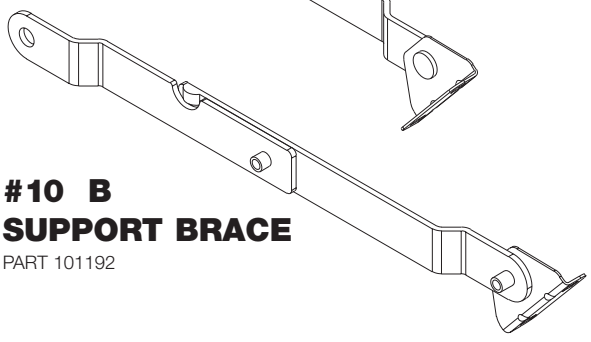

#10 B SUPPORT BRACE
PART 101192

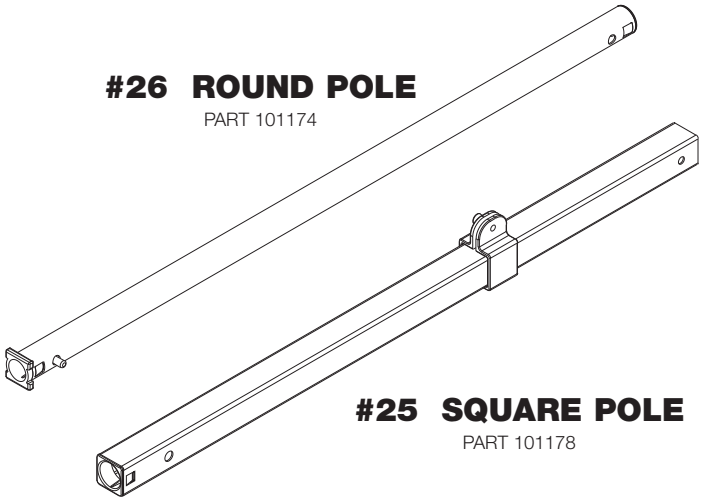


#26 ROUND POLE
PART 101174

#25 SQUARE POLE
PART 101178

ReelSchematic

PARTS IDENTIFICATION (Parts below this box ARE shown actual size.)



#29 1" WASHER
PART 101206




#4 NYLOCK NUT
PART 101163




#2 KEPS NUT
PART 101191




#11 3/4" SCREW
PART 101212




#30 3/4" SCREW
PART 101207



#20 1-1/2" SCREW
PART 101208



#18 CARRIAGE BOLT
PART 101209




#27 1-3/4" BOLT
PART 101211



#15 2" SCREW
PART 101230

ReelSchematic

CLAM 1060 EXPLODED DRAWING

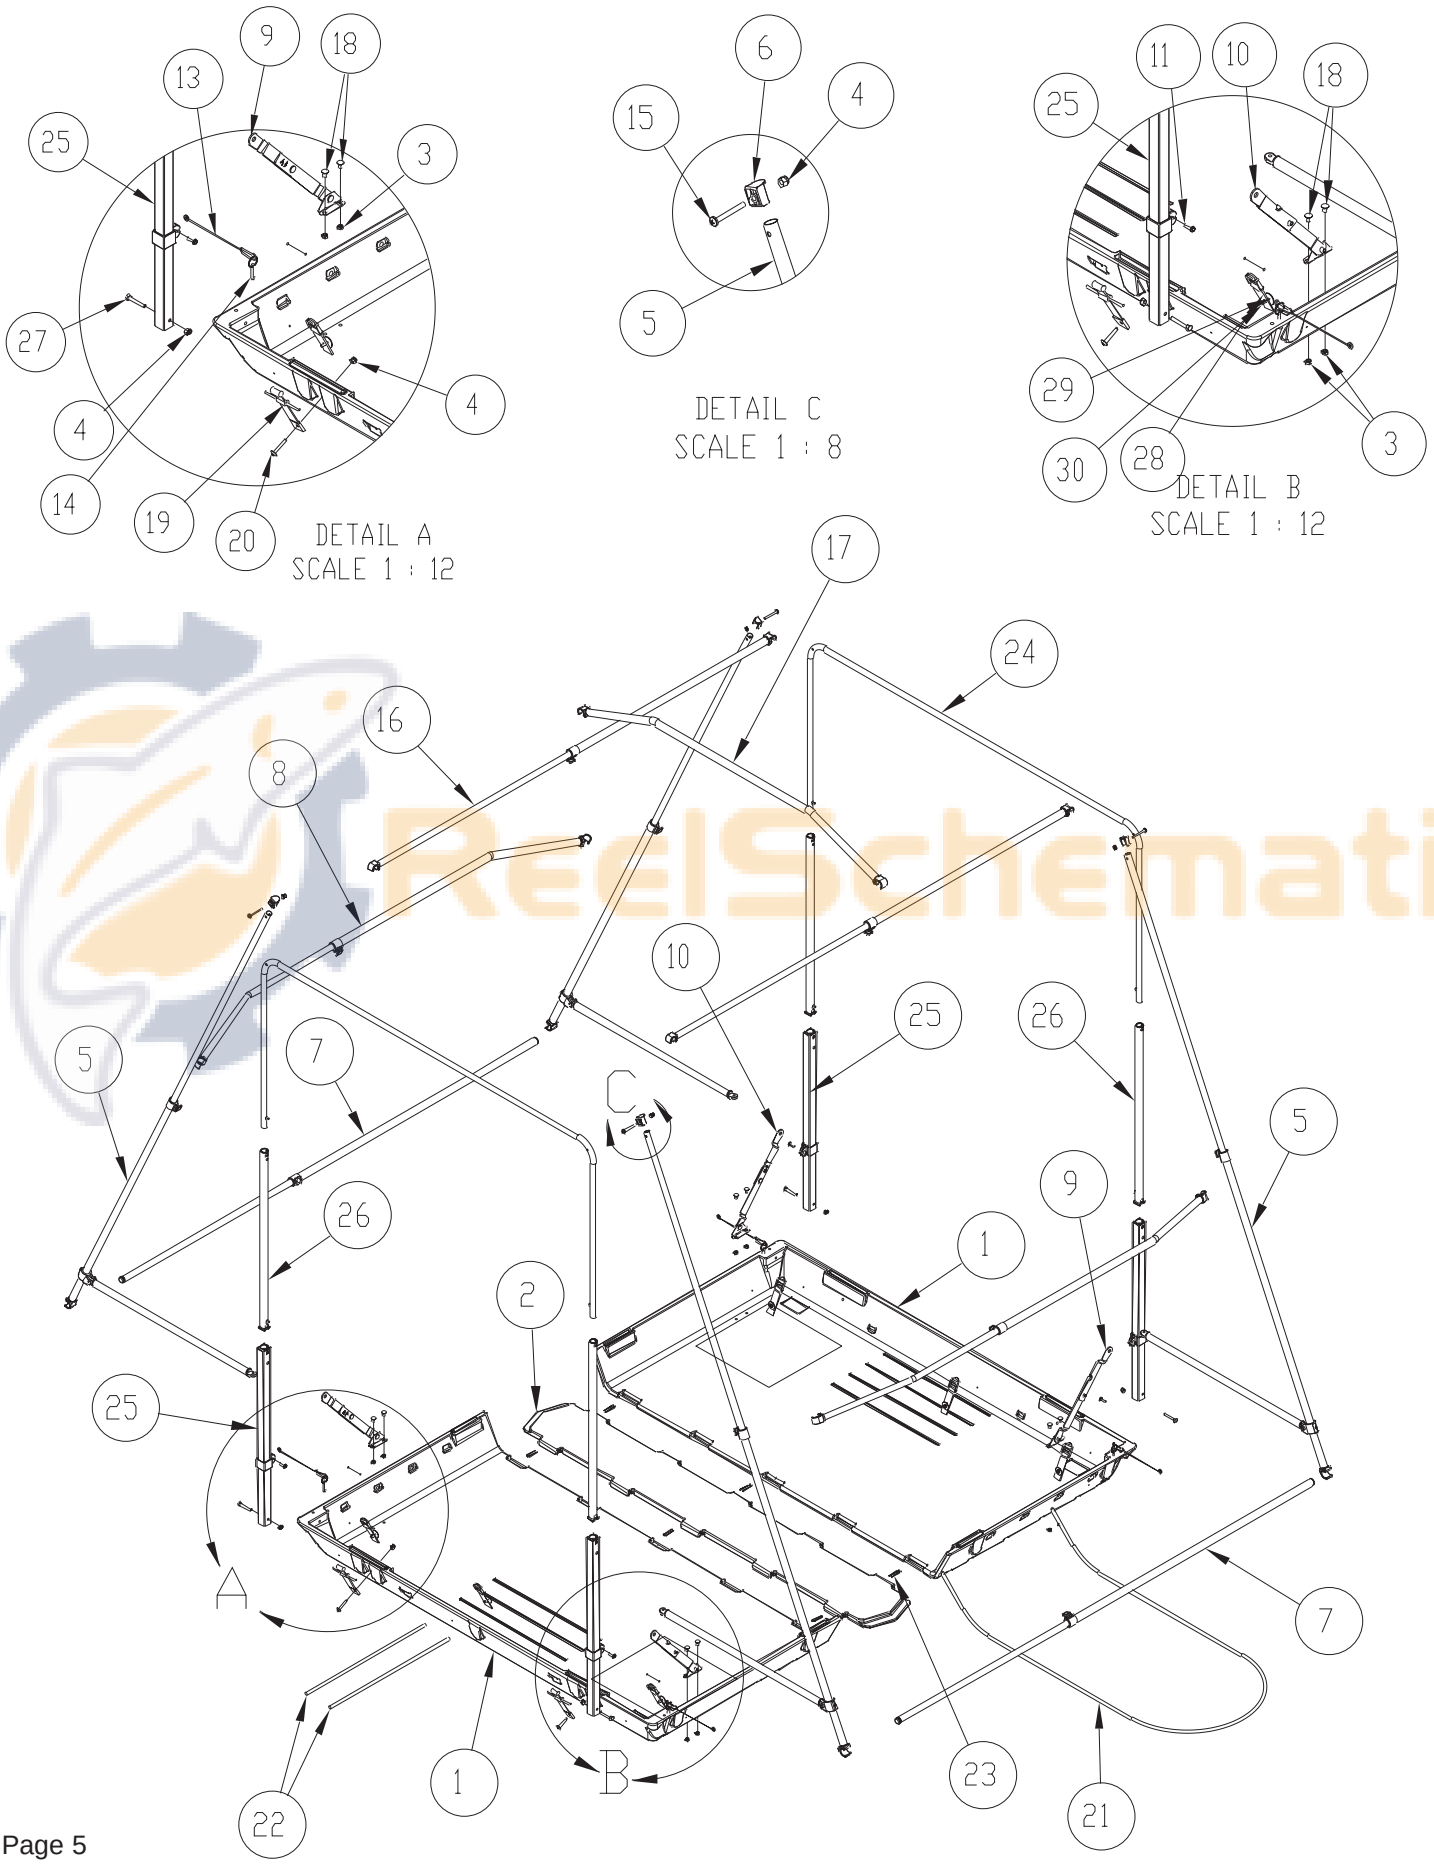

ReelSchematic

ASSEMBLY INSTRUCTIONS

BEFORE ATTEMPTING TO USE THIS PRODUCT ON THE ICE practice setting up and taking down at home in the comfort of a heated area. Repeat several times until comfortable. This will make your on-ice set-up much easier.

NO TOOLS ARE NEEDED FOR ASSEMBLY OF YOUR CLAM 1060.

1. INITIAL SET-UP

a. Open the Clam 1060 and lay on a flat level surface. **See Diagram A.**

b. Lift up the two hoop pole sections until the snap button locks into place. Lock the braces. (Both ends.)

c. Extend the four side assemblies and lock into place using the detent pin. **See Diagram B.**

d. Extend the hoop pole sections up until the snap buttons engage into all the holes. (Both ends.) **See Diagram C.**

e. Unfold the tent and unzip both doors. Pull the tent over the two hoop poles.

f. Attach the three velcro strips to the hoops on top of the doors. **See Diagram D.**

2. INSERT POLES

a. From the outside of the 1060, insert the two lower spreader tubes into the four corner pockets of the tent. Adjust tubes until tent is snug, then tighten adjustment knob. Attach side tube assembly to the lower spreader pole. **See Diagram E.**

b. Install the two upper spreader tubes along the sides and on top of the hoop poles. **See Diagrams F, G.**

c. Install the dome pole in the center of the 1060. **See Diagram H.** *(Note: The dome pole is the non-adjustable pole.)*

d. Install the two wall poles on each side. The two wall poles are placed below the windows and secured with velcro. **See Diagram I.**

3. FASTEN THE TENT

a. Fasten the tent to the base by inserting the strap from the tent through the back of the buckle. **See Diagram J.** Pull the strap until the elastic on the buckle starts to stretch. Do not over stretch the elastic straps.

b. Fold the tab on the buckle over and all the way down to fasten. **See Diagram K.** *(Note: This only needs to be done the first time you set up your 1060.)*

ASSEMBLY INSTRUCTIONS

4. ATTACH THE LICENSE HOLDER *(Check with local authorities to see if this is required in your area; it is regulation in Minnesota.)*

a. Locate the position on the tent where you'd like to affix the license holder. Using a sharp nail or awl, poke a hole through the tent in the center of each grommet.

b. To attach the license holder, simply put the provided rivet through the grommet hole and tent. To secure, push the cap of the rivet set onto the back, it will ratchet together. **See Diagram L.** *(Note: This only needs to be done the first time you set up your 1060.)*

c. Write your drivers license number in 3" bold lettering on a piece of paper and insert it in the license holder. This must remain in place at all times while your Clam is on the ice.

5. DISMANTLING YOUR CLAM

a. To take your Clam 1060 down, repeat steps 1–3 in reverse order. You can leave the license holder attached, however. Secure the side assemblies using the velcro straps on the door. **See Diagram M.**

b. Lay all the poles on one side of the base. Fold the tent into the base, making sure you don't fold or crease the windows as that could cause them to crack. **See Diagram N.**

c. Close up the base and secure the rubber latches.

ReelSchematic

Note: Continuous pulling behind a four wheeler or snowmobile will result in premature wear of the base. We recommend a ski or slide system be mounted to the base of your Clam (i.e., nylon strapping or old downhill or cross country skis).

ASSEMBLY DIAGRAMS

DIAGRAM A



DIAGRAM B



DIAGRAM C

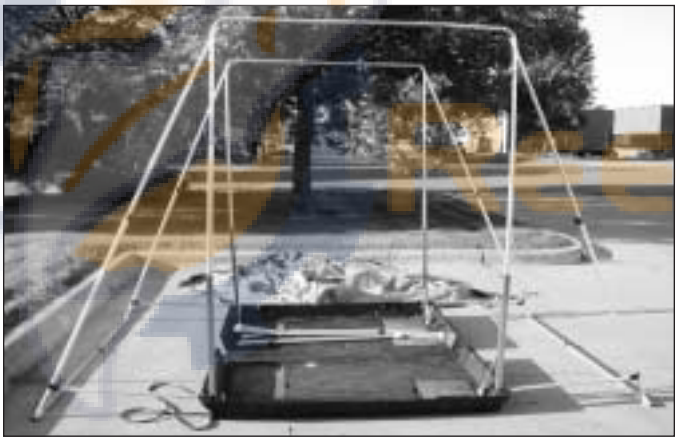


DIAGRAM D



DIAGRAM E



DIAGRAM F



ASSEMBLY DIAGRAMS

DIAGRAM G



DIAGRAM H



DIAGRAM I



DIAGRAM J

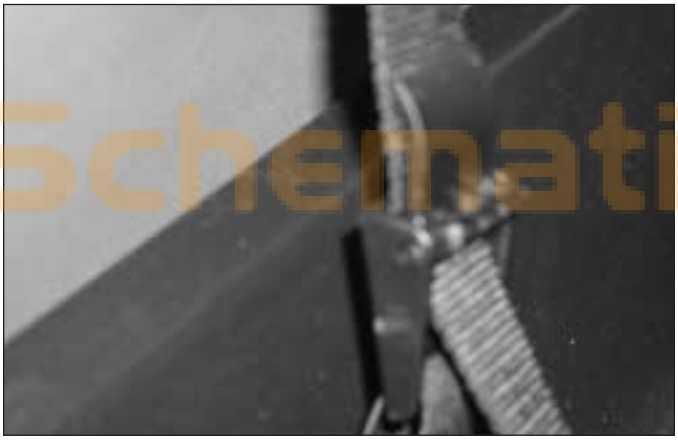



DIAGRAM K



ReelSchematic

ASSEMBLY DIAGRAMS

DIAGRAM L

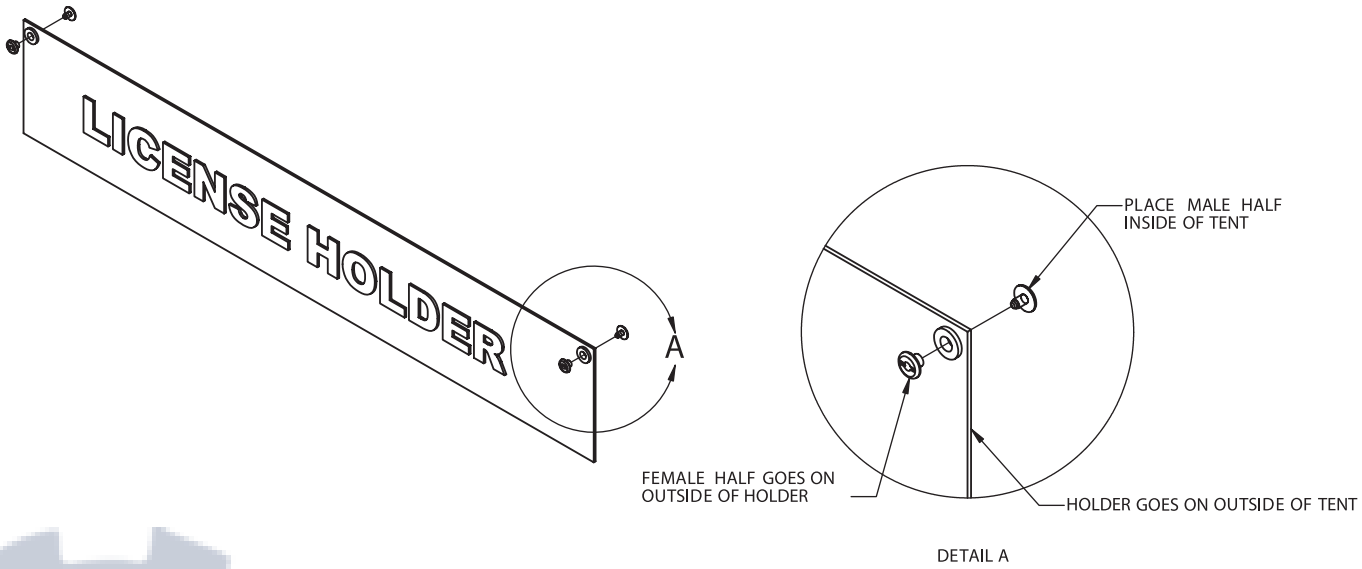

DETAIL A

DIAGRAM M

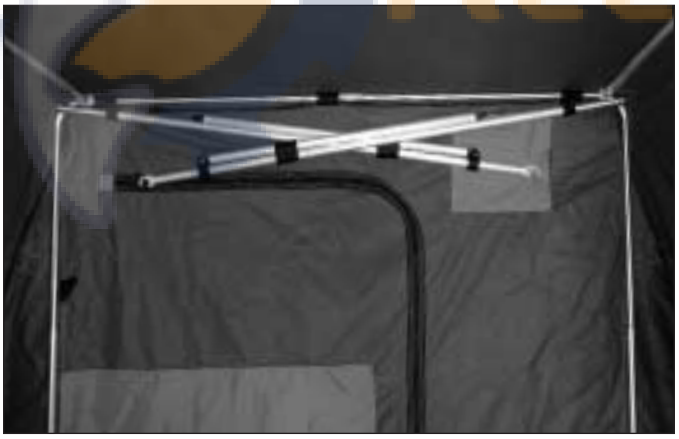


DIAGRAM N



ReelSchematic

TIPS FOR USE

THE CLAM 1060 — FISHES BIG, PACKS SMALL.

The Clam 1060 offers a large 10' x 6' fishing space. The tubular frame adds extra strength using the Clam easy Snap-up System, and the tent is made of extra strong, super tough, Ice Armor™ with Velcro® pole attachments. The 1060 will fit in to most Sport Utility Vehicles and even "mini pickups", because its pack size is only 60" long.

THE CLAM 1060 COMES STANDARD WITH:

- Extra-wide front and back doors
- Two-way zippers
- Four clear vinyl window with cover flaps
- Two mesh side vent windows
- Two large internal mesh storage pockets
- Corner safety reflectors
- License holder



featuring

ICE ARMOR™

Scientifically Engineered Weather Protection.

Ice Armor™ forms an impervious barrier against wind, snow and water. It's light-weight, incredibly durable, and unlike other fabrics, Ice Armor will not tear.
Only Ice Armor includes a special fire retardant.

THE ONLY ORGANIZATION IN NORTH AMERICA DEDICATED TOTALLY TO THE SPORT OF ICE FISHING.

The mission of Ice Team is to promote and enhance the quality of ice fishing and to encourage the ice fisherman to broaden their abilities, knowledge, and techniques with the best products and services on the market today.

Check out **www.iceteam.com** for more information.

- Keep Informed
- Hot Tips
- Tournaments



MAINTENANCE & CARE INSTRUCTIONS

- Make sure your Clam is completely dried out before storing for long periods of time.
- Store your Clam in a cool, dry place and away from rodents.

WARRANTY

Clam Corporation, Inc. warrants to the original retail purchaser that all Clams are free from manufacturers defects for one (1) year from the date of the original purchase.

Warranty does not cover cracked windows, tent tears, broken or bent hoops due to high wind weather conditions or unattended use.

Clam Corporation will replace or repair any part found defective within the one (1) year time limit. All parts must be returned to Clam Corporation, Inc. Before returning any parts, you must first call or write and acquire a return authorization. All returns must be returned postage-prepaid and include the original cash register receipt (date and purchase price).

To obtain a return authorization, call or write:

Clam Corporation, Inc.
Attn: Customer Service - Returns
15600 28th Avenue North
Minneapolis, MN 55447
Phone 763-231-4120
Fax 763-231-4121
Email customerservice@clamcorp.com

Customer service hours:
9am – 4pm
Monday – Friday
Central standard time

The warranty does not apply to any Clam which has been subjected to an accident, improper installation, modification, adjustment, repair, misuse, misapplication, neglect, including but not limited to improper maintenance, or use of unauthorized parts or attachments.

LIMITATION OF LIABILITY

It is expressly understood that Clam Corporation liability for its products, whether due to breach of warranty, negligence, strict liability, or otherwise, is limited to the repair of the product as stated above. Clam Corporation is not liable for any injury, loss, damage, or expense, whether direct or consequential, including but not limited to loss of use, income, profit, or damage to material arising in connection with the sale, installation, use of, inability to use, or the repair or replacement of Clam Corporation products. Clam Corporation reserves the right to make alterations or modifications in its products at any time, which in its opinion, may improve the performance and efficiency of the product. It shall not be obligated to make such alterations or modifications to products already in service.