



GMI 10 Installation Instructions

To obtain the best possible performance, install your GMI 10 Marine Instrument according to the following instructions. If you experience difficulty during the installation, contact Garmin Product Support, or seek the advice of a professional installer.

The GMI 10 will communicate with NMEA 2000- or NMEA 0183-compatible sensors and devices, and can show information such as speed, heading, water depth, and fuel information when connected to the appropriate sensors.

WARNING: See the *Important Safety and Product Information* guide in the product box for product warnings and other important information.

Product Registration

Help us better support you by completing our online registration at www.garmin.com/registration/.

For future reference, write down the serial number assigned to your GMI 10 in the space provided below. The serial number is located on a sticker on the back of the GMI 10.

Serial number _____

Contact Garmin

Contact Garmin if you have any questions while installing or using your GMI 10. In the USA contact Garmin Product Support by phone: (913) 397-8200 or (800) 800-1020; or go to www.garmin.com/support/.

In Europe, contact Garmin (Europe) Ltd. at +44 (0) 870.8501241 (outside the UK) or 0808 2380000 (within the UK).

Packing List and Accessories

Before installing your GMI 10, confirm that your package includes the following items. If any parts are missing, contact your Garmin dealer immediately.

Standard Package

- GMI 10 unit
- Protective cover
- Flush mount hardware
- Power/data wiring harness
- 2 NMEA 2000 T-connectors
- 2 NMEA 2000 terminators (1 male, 1 female)
- 1 NMEA 2000 drop cable (2 m)
- 1 NMEA 2000 power cable (2m), (3 A fuse)
- Installation instructions

Optional Accessories

- Additional NMEA 2000 network components

Tools Needed

- Jigsaw or 3 ¹⁷/₃₂ in. (90mm) hole saw,
- Drill and drill bits
- Center punch and hammer
- Scissors
- File and sandpaper
- Phillips head screwdriver
- Anti-seize lubricant (optional)

To install and use your GMI 10

1. Select a location.
2. Flush mount the GMI 10.
3. Connect the GMI 10 to power.
4. Connect the GMI 10 to sensors.

Step 1: Select a Location for the GMI 10

Consider the following when you select an installation location:

- Provides optimal viewing as you operate your vessel.
- Allows easy access to the keypad on the GMI 10.
- Is strong enough to support the weight of the GMI 10 and protect it from excessive vibration or shock.
- Allows room for the routing and connection of the cables for power and data. There should be at least a 3-inch (8 cm) clearance behind the case.
- Is at least 9 1/2 in. (241 mm) from a magnetic compass, to avoid interference.
- Mount the GMI 10 in an area that is not exposed to extreme temperature conditions.

NOTE: The temperature range for the GMI 10 is from 5°F to 158°F (from -15°C to 70°C). Extended exposure to temperatures outside this range (in storage or operating conditions) may cause failure of the LCD screen or other components. This type of failure and related consequences are not covered by the manufacturer's limited warranty.

Step 2: Flush Mounting the GMI 10

In addition to four of the included mounting screws (number 8 ANSI (4.2 × 1.4 DIN7981)), flush mounting the GMI 10 requires the following tools:

- Phillips-head screwdriver
- Drill and drill bit (refer to the Pilot Hole Size Table on [page 3](#) for drill bit size) for mounting holes
- 3/8 in. (10 mm) drill bit for pilot hole
- Jigsaw
- Scissors
- Center punch and hammer
- File and sandpaper
- Anti-seize lubricant (optional)
- Counterbore bit (for fiberglass installations)

NOTE: Ensure that the surface on which you mount the GMI 10 has sufficient open space behind it to accommodate the GMI 10 and the connected wires.

To flush mount the GMI 10:

1. The flush-mount template is included in the product box. Trim the template and ensure it will fit in the location at which you want to flush mount the GMI 10.
2. The flush-mount template has adhesive on the back. Remove the protective liner and apply the template to the location where you want to flush mount the GMI 10.
3. If you will be cutting the hole with a jigsaw, and not a 3 17/32 in. (90 mm) hole saw, use a 3/8 in. (10 mm) drill bit to drill a pilot hole as indicated on the template to begin cutting the mounting surface.
4. Using the jigsaw or 3 17/32 in. (90 mm) hole saw, cut the mounting surface along the inside of the dashed line indicated on the flush-mount template. Use a file and sandpaper to refine the size of the hole.
5. Place the GMI 10 into the cutout, to confirm that the four mounting-holes are correct after refining the hole. If not, mark the correct locations of the four mounting holes. Remove the GMI 10 from the cutout.
6. Using the center punch, indent the center of each of the four mounting-hole locations.



7. Using a drill bit as specified by the Pilot Hole Size Table, drill the four mounting holes.

Material	Material Thickness (in.)	Material Thickness (mm)	Hole Size (in.)	Hole Size (mm)	Hole Size (Drill Number)
Aluminum alloy sheet metal	from $\frac{1}{32}$ to $\frac{5}{64}$	from 0.76 to 2.03	.128	3.25	30
	from $\frac{3}{32}$ to $\frac{3}{8}$	from 2.28 to 9.52	.147	3.73	26
Fiberglass—all thicknesses			.140	3.56	28
High Density Plastic—all thicknesses			.125	3.17	$\frac{1}{8}$
Plywood (resin impregnated)—Professional installation recommended			.144	3.66	27

Pilot Hole Size Table

NOTE: If you are mounting the chartplotter in fiberglass, it is recommended to use a countersink bit to drill a clearance-counterbore through only the top gel-coat layer. This will help to avoid any cracking in the gel-coat layer when the screws are tightened

8. Place the GMI 10 into the cutout

9. Securely tighten the four mounting screws through the GMI 10 into the drilled mounting holes.


NOTE: Stainless-steel screws may bind when screwed into fiberglass and overtightened. Garmin recommends applying an anti-galling, stainless anti-seize lubricant to the screw before using.

10. Install the mounting covers by snapping them into place.

Step 3: Connect the GMI 10 to Power

The GMI 10 comes with a cable assembly that connects it to power and provides interface capabilities for connecting external devices with NMEA 0183 (page 6).

The replacement fuse is an AGC/3AG – 1 A fuse. If it is necessary to extend the power wires, use 18 AWG wire. If your boat has an electrical system, you might be able to wire the GMI 10 directly to an unused holder on your current fuse block. If you are using the fuse block, remove the in-line fuse holder supplied with the GMI 10. You can also wire the GMI 10 directly to the battery.

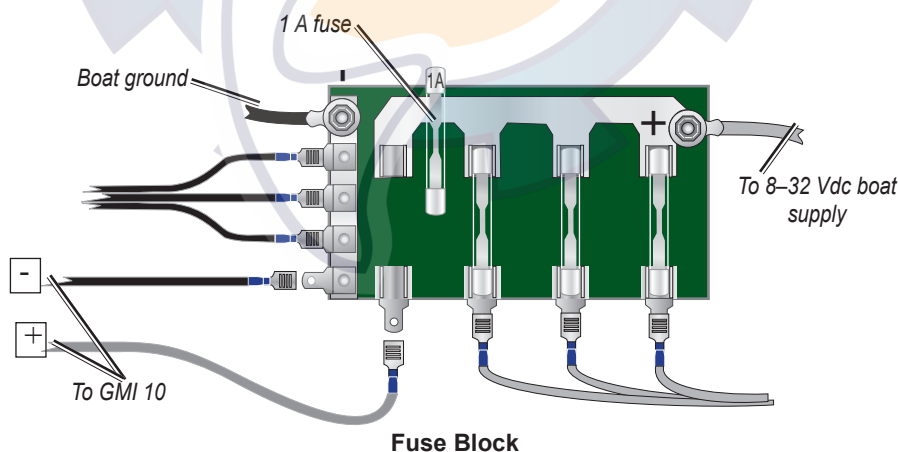

CAUTION: The GMI 10 maximum input voltage is 32 Vdc. Do not exceed this voltage, because this can damage the GMI 10 and void the warranty.

NOTE: During a typical installation, use only the red and black wires. The other wires are used for NMEA 0183 connections, and do not have to be connected for normal operation of the GMI 10. For information on connecting to a NMEA 0183-compatible device, see page 6.

To install the wiring harness:


1. Use a test light or voltmeter to determine the polarity of the voltage source.
2. Connect the red (+ or positive) wire to the positive voltage terminal. (If you use the fuse block on the boat, route the positive connection through the fuse, as shown on the diagram.)
3. Connect the black (- or ground) wire to the negative voltage terminal.
4. Install or check the AGC/3AG – 1 A fuse (on the fuse block or in the in-line holder).
5. Align the notches on the cable plug and on the back of the GMI 10. Insert the cable into the connector, and turn the locking ring counter-clockwise until it stops.

Step 4: Connect the GMI 10 to Sensors

The GMI 10 can connect to sensors using either NMEA 2000 or NMEA 0183.

Connecting the GMI 10 through NMEA 2000

The GMI 10 is packaged with the necessary NMEA 2000 connectors and cable to either connect the GMI 10 to your existing NMEA 2000 network, or build a basic NMEA 2000 network. For more information on NMEA 2000, visit www.garmin.com. Follow the directions and reference the diagrams on [page 5](#) to either connect the GMI 10 to your existing NMEA 2000 network, or to build a basic NMEA 2000 network.

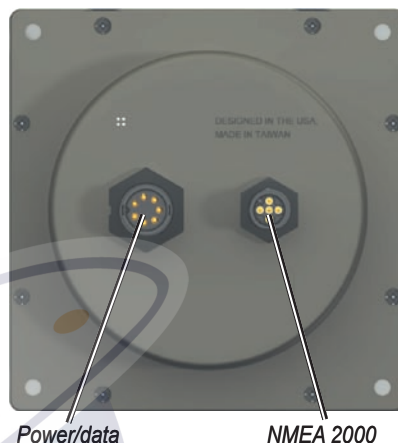

To connect the GMI 10 to your existing NMEA 2000 network:

1. Determine where you would like to connect the GMI 10 to your existing NMEA 2000 backbone.
2. Disconnect one side of a NMEA 2000 T-connector from the backbone at an appropriate location.
If you need to extend the NMEA 2000 backbone, connect an appropriate NMEA 2000 backbone extension cable (not included) to the side of the T-connector you disconnected.
3. Add the included T-connector for the GMI 10 in the NMEA 2000 backbone by connecting it to the side of the T-connector you disconnected.
4. Route the included drop cable to the bottom of the T-connector you just added to your NMEA 2000 network.
If the included drop cable is not long enough, you can use a drop cable up to 20 ft. (6 m) long (not included).
5. Connect the drop cable to the T-connector and the GMI 10.




CAUTION: If you have an existing NMEA 2000 network on your boat, it should already be connected to power. Do not connect the included NMEA 2000 power cable to an existing NMEA 2000 network, because only one power source should be connected to a NMEA 2000 network.

To create a basic NMEA 2000 Network


1. Connect the two T-connectors together by their sides.
2. The included NMEA 2000 power cable must be connected to a 12 Vdc power source through a switch. Connect to the ignition switch of the boat if possible, or through an appropriate additional switch (not included).
3. Connect the NMEA 2000 power cable to one of the T-connectors.
4. Connect the included NMEA 2000 drop cable to the other T-connector and to the GMI 10.
5. Add additional T-connectors for each sensor (not included) you want to add to the NMEA 2000 network, and connect each sensor to a T-connector with the appropriate drop cable (not included).
6. Connect the appropriate terminators to each end of the combined T-connectors.



CAUTION: You must connect the included NMEA 2000 power cable to the boat's ignition switch, or through an external switch. The GMI 10 will drain your battery if it is connected directly.

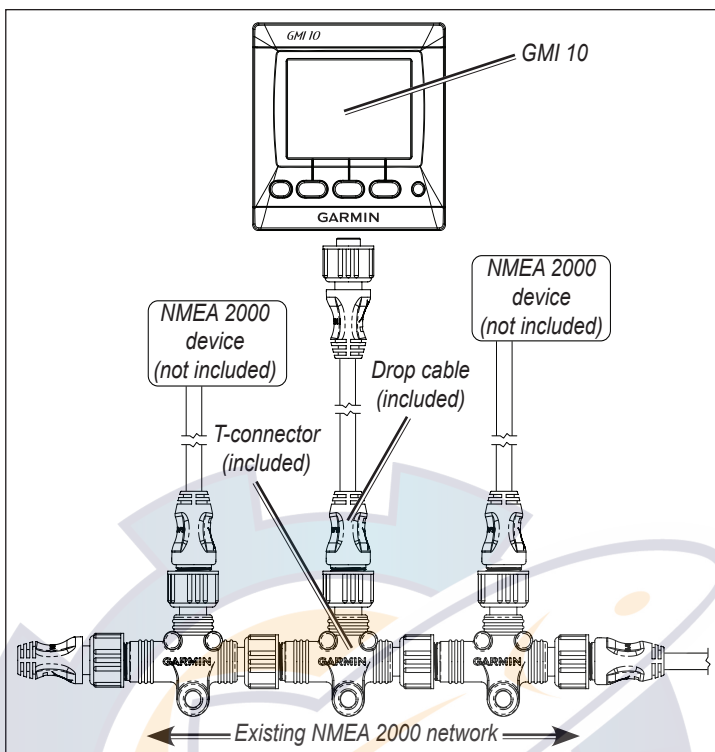

Connecting the GMI 10 to an Existing NMEA 2000 Network

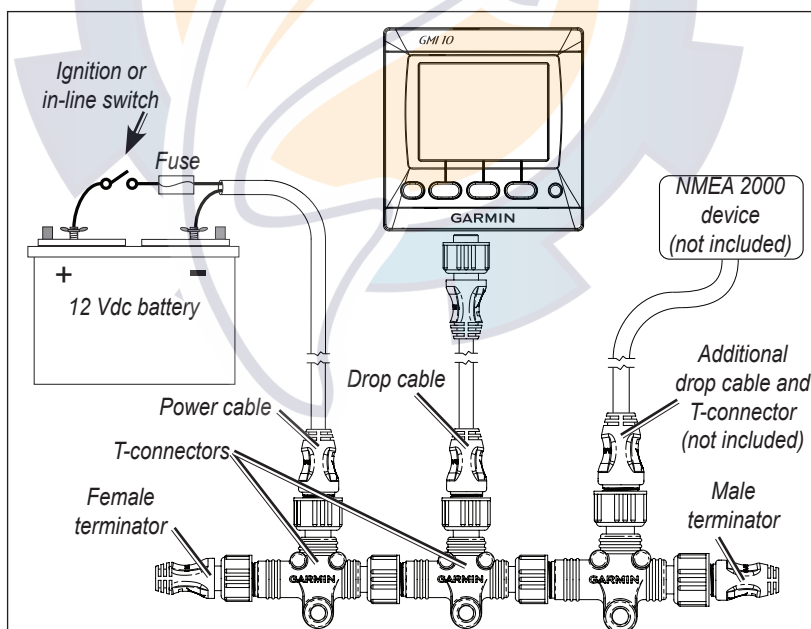

Creating a Basic NMEA 2000 Network


Notes:

- To add additional sensors to your NMEA 2000 network, follow the instructions included with the sensor.
- To learn more about NMEA 2000 and building a NMEA 2000 network, visit www.garmin.com.
- The GMI 10 is not powered by the NMEA 2000 network, it must be separately connected to the power source.



Connecting the GMI 10 through NMEA 0183

The GMI 10 can receive NMEA 0183 data from one device. The GMI 10 displays the received data, but cannot transmit the data to another NMEA 0183 device or transmit the data to a NMEA 2000 network.

Use the diagrams to wire a NMEA 0183 device to your GMI 10. Use 22 AWG, shielded, twisted-pair wiring for extended runs of wire. Solder all connections and seal them with heat-shrink tubing.

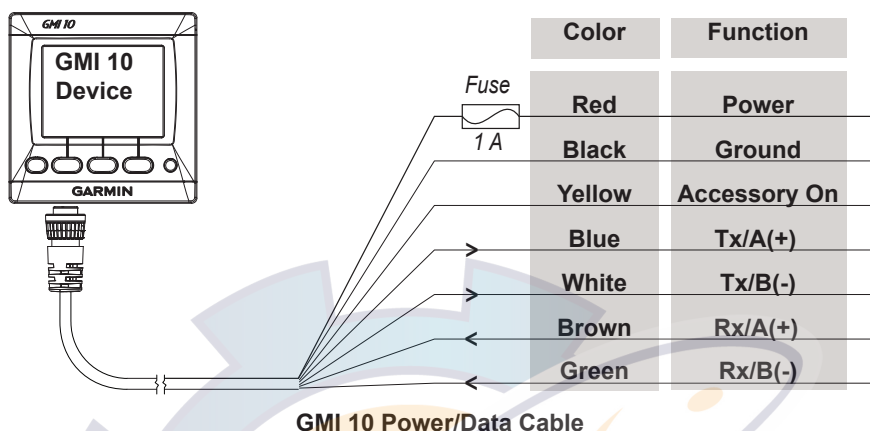

Examples:

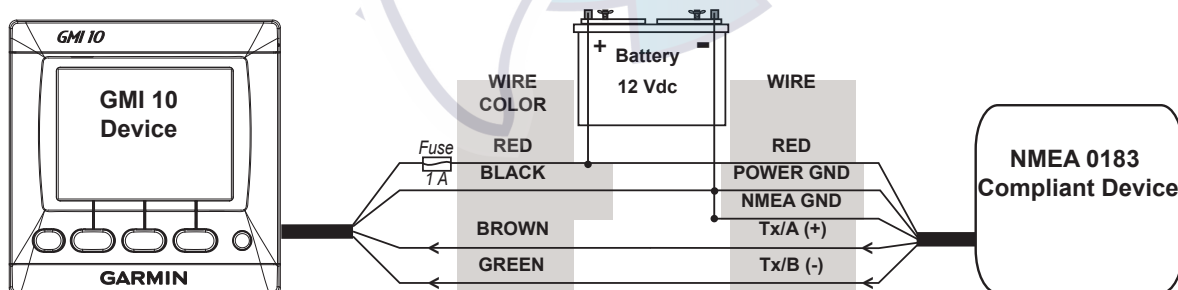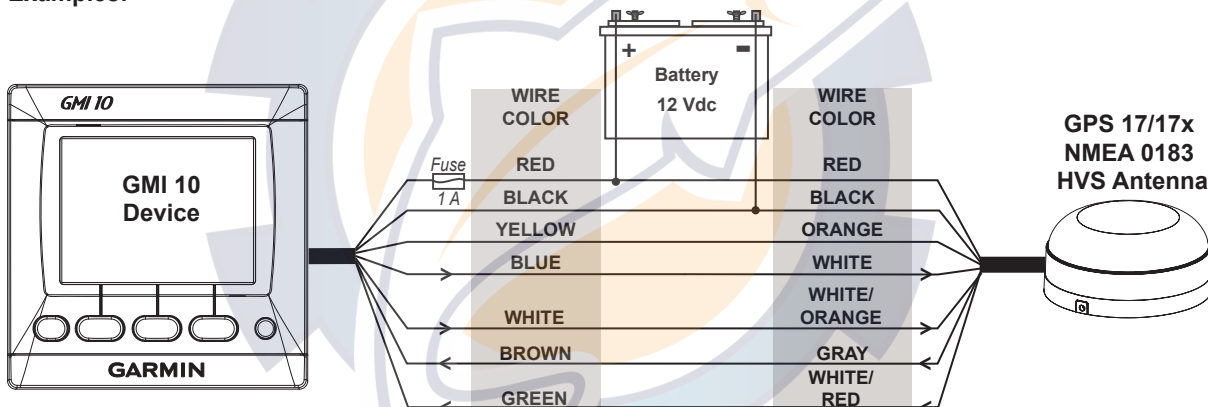


Notes:

- Consult the installation instructions for your NMEA 0183-compliant device to identify the Transfer (TX) A(+) and B(-) wires.
- If your NMEA 0183-compliant device has only one transmitting wire (Tx), connect it to the brown wire (Rx/A) from the GMI 10, and connect the green wire (Rx/B) to ground.
- The blue (Tx/A) and white (Tx/B) wires are used only when wiring the GMI 10 to a Garmin GPS 17/17x antenna.
- The yellow (accessory on) wire is used only when wiring the GMI 10 to a Garmin GPS 17/17x antenna.

NMEA 2000 PGN Information

Use this table to determine the approved NMEA 2000 PGN information that can be received and transmitted by a GMI 10 when communicating with a NMEA 2000-compliant device.

Receive		Transmit	
059392	ISO Acknowledgment	059392	ISO Acknowledgment
059904	ISO Request	059904	ISO Request
060928	ISO Address Claim	060928	ISO Address Claim
126208	NMEA - Command/Request/Acknowledge Group Function	126208	NMEA - Command/Request/Acknowledge Group Function
126464	Transmit/Receive PGN List Group Function		
126992	System Time	126464	Transmit/Receive PGN List Group Function
126996	Product Information		
127250	Vessel Heading	126996	Product Information
127489	Engine Parameters - Dynamic		
127505	Fluid Level		The GMI 10 is NMEA 2000 certified
128259	Speed - Water Referenced		
128267	Water Depth		
129025	Position - Rapid Update		
129026	COG & SOG - Rapid Update		
129029	GNSS Position Data		
129044	Datum		
129283	Cross Track Error		
129284	Navigation Data		
129285	Navigation - Route/WP information		
129539	GNSS DOPs		
129540	GNSS Sats in View		
130306	Wind Data		
130310	Environmental Parameters		
130311	Environmental Parameters		
130312	Temperature		
130313	Humidity		
130314	Actual Pressure		

NMEA 0183 Sentence Information

The GMI 10 can receive the following approved NMEA 0183 sentences from a NMEA 0183-compliant device:

BOD, BWC, DBT, DPT, GGA, GLL, GSA, GSV, HDG, HDM, MDA, MTW, MWD, MWV, RMB, RMC, VHW, WPL, and XTE.

Specifications

Physical

Dimensions: 4 ⁵/₁₆ in. (109 mm) W × 4 ³/₈ in. (111 mm) H × 1 ²⁹/₃₂ in (48 mm) D

Weight: 9.6 oz (272 g)

Cables: Power/data cable - 6 ft (1.8 m)
NMEA 2000 drop cable and power cable- 6 ¹/₂ ft (2 m)

Temp range: 5°F (-15°C) to 158°F (70°C)

Compass Safe Distance: 9 ¹/₂ in. (241 mm)

Case Material: Fully gasketed, high-impact plastic alloy, waterproof to IEC 529 IPX7 standards

Power

GMI 10 power input source: 8–32 Vdc

Fuse: AGC/3AG – 1 A

GMI 10 power usage: 2.5 W max

NMEA 2000 Power Input: 9-16 Vdc

NMEA 2000 Load Equivalency Number (LEN): 2 (100 mA)

Declaration of Conformity (DoC)

Hereby, Garmin, declares that this GMI 10 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.



To view the full Declaration of Conformity, see the Garmin Web site for your Garmin product:
www.garmin.com/products/gmi10/. Click **Manuals**, and then select the **Declaration of Conformity** link.

Software License Agreement

BY USING THE GMI 10, YOU AGREE TO BE BOUND BY THE TERMS AND CONDITIONS OF THE FOLLOWING SOFTWARE LICENSE AGREEMENT. PLEASE READ THIS AGREEMENT CAREFULLY.

Garmin grants you a limited license to use the software embedded in this device (the “Software”) in binary executable form in the normal operation of the product. Title, ownership rights, and intellectual property rights in and to the Software remain in Garmin.

You acknowledge that the Software is the property of Garmin and is protected under the United States of America copyright laws and international copyright treaties. You further acknowledge that the structure, organization, and code of the Software are valuable trade secrets of Garmin and that the Software in source code form remains a valuable trade secret of Garmin. You agree not to decompile, disassemble, modify, reverse assemble, reverse engineer, or reduce to human readable form the Software or any part thereof or create any derivative works based on the Software. You agree not to export or re-export the Software to any country in violation of the export control laws of the United States of America.



© Copyright 2008 Garmin Ltd. or its subsidiaries

Garmin International, Inc.
1200 E 151st Street, Olathe, Kansas 66062 USA
Tel. 913/397.8200
Fax. 913/397.8282

Garmin (Europe) Ltd
Liberty House, Hounsdown Business Park, Southampton, Hampshire, SO40 9RB UK.
Tel. 44/0870.8501241 (outside the UK.) or 0808 2380000 (UK only)
Fax. 44/0870.8501251

Garmin Corporation
No. 68, Jangshu 2nd Road, Shijr, Taipei County, Taiwan
Tel. 886/2.2642.9199
Fax. 886/2.2642.9099