
Kamloops "MC" Fly Reel

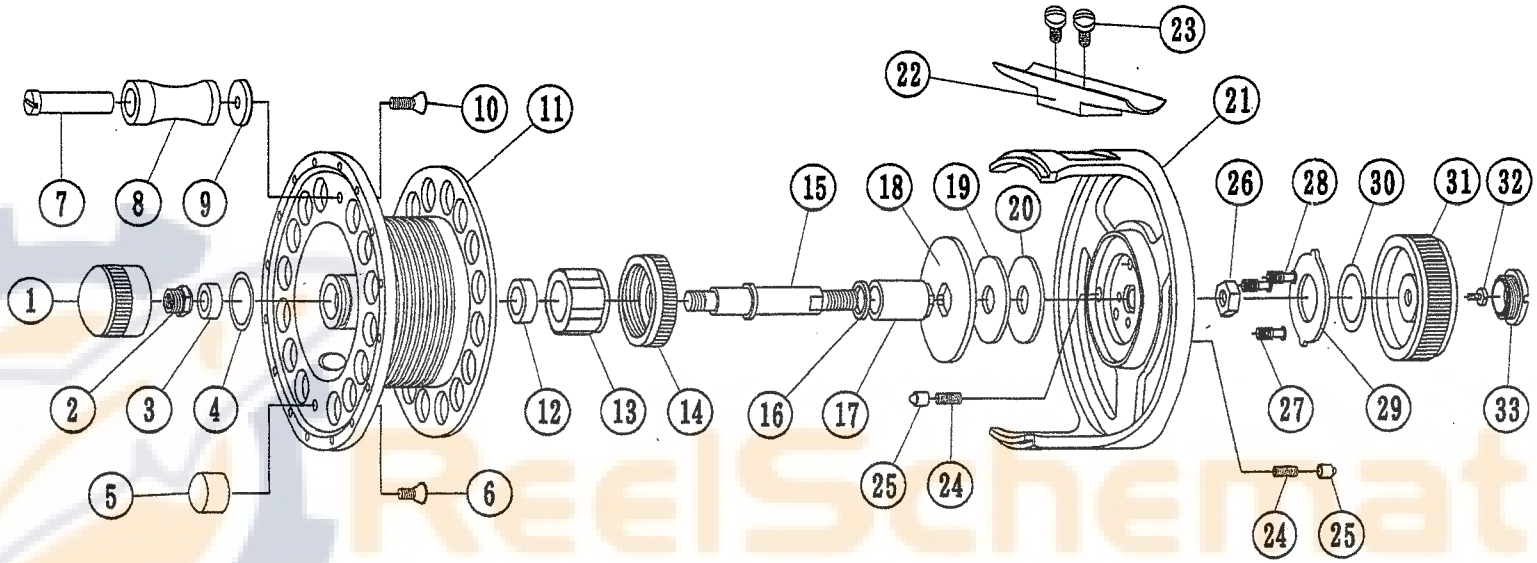

HOW TO CHANGE THE DRAG From LEFT To RIGHT HAND WIND

1. Remove(Unscrew) the Bearing Cover (Part 14).
2. Remove the O/Way Bearing (Part 13).
3. Reverse (Turn Upside Down) the O/Way Bearing and Return To Original place.
4. Return the Bearing Cover to Original place.

NO	PART NAME	NO	PART NAME	NO	PART NAME	NO	PART NAME	NO	PART NAME
1	SPOOL CAP	8	HANDLE KNOB	15	MAIN SHAFT	22	STAND	29	DRAG W/S - C
2	SPOOL CAP NUT	9	H/KNOB COLLAR	16	DRAG W/S - A	23	STAND SCREW	30	O - RING
3	BALL BEARING	10	H/KNOB SCREW	17	SLEEVE BUSH	24	CLICK SPRING	31	DRAG KNOB
4	O - RING	11	SPOOL	18	DRAG PLATE	25	CLICKER	32	DRAG SCREW
5	BALANCE WEIGHT	12	BALL BEARING	19	DRAG W/S - B	26	M/SHAFT NUT	33	D/KNOB CAP
6	BALANCE SCREW	13	O/WAY BEARING	20	DRAG W/S - D	27	DRAG PLATE S/P		
7	H/KNOB SHAFT	14	BEARING COVER	21	FRAME	28	DRAG PLATE PIN		