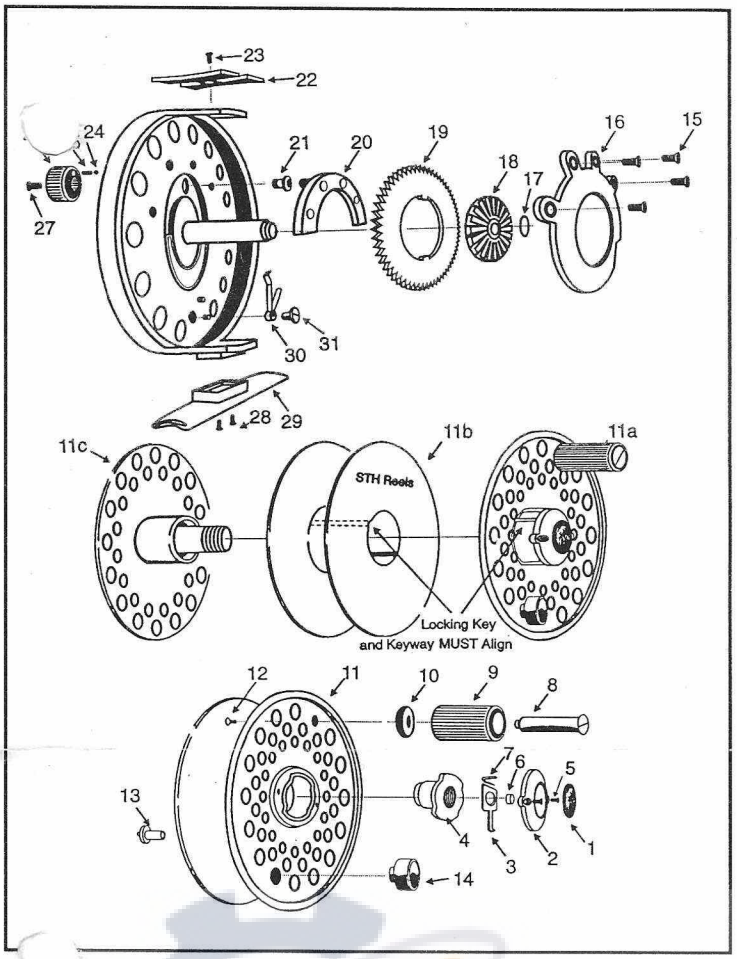


DISK DRAG REELS PARTS LIST

1. STH Medallion
2. Retainer
3. Retainer Clip
4. Front Flange Retainer
5. Stainless Steel Screws (2)
6. Spacer
7. Retainer Spring
8. Handle Fastener
9. Handle
10. Spacer
11. Spool Housing
11a. Front Flange of Spool
11b. Cassette
11c. Rear Flange of Spool
12. Handle Fastener Screw
13. Stop Pin Assy.
14. Counter Weight
15. Disk Drag Cover Retainer Screws
16. Disk Drag Cover
17. O Ring
18. Reversible Disk Gear
19. Disk
20. Drag Pad
21. Splined Worm Gear
22. Line Guard
23. Line Guard Screw
24. Drag Adjustment Knob Bearing
25. Drag Adjustment Knob Spring
26. Drag Adjustment Knob
27. Drag Adjustment Knob Screw
28. Foot Fasteners
29. Reel Foot
30. Clicker Spring
31. Clicker Spring Post

OWNER'S MANUAL
DISK DRAG CASSETTE REELS

Please take a few minutes to read through this Owner's Manual.

DRAG ADJUSTMENT

The Drag on the Disk Drag Reel features cork against naval bronze. Just turn the knob to increase or decrease pressure.

TO REMOVE SPOOL

Just push release lever toward handle. (Release lever is located near center of reel next to counterweight. See picture below.) Then pull spool from reel.

RIGHT OR LEFT HAND CONVERSION

To change to right or left hand use, just follow these steps:

1) Remove spool.
2) Lift center gear out of disk and remove from shaft.
3) Flip center gear and replace on shaft.
4) Make certain that keyways on center gear match up with slots on disk.
5) Replace spool and go fishing.

TO CHANGE CASSETTE

1) Remove spool from reel.
2) Grasp front flange with left hand and UNSCREW rear flange counter-clockwise.
3) Remove cassette from spool.
4) Replace cassette (RH facing out for right-hand wind – LH facing out for left-hand wind).
5) Screw rear flange onto spool. Tighten firmly.
6) Replace spool on reel.

Figure A


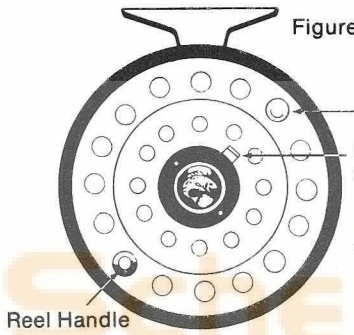


Figure B

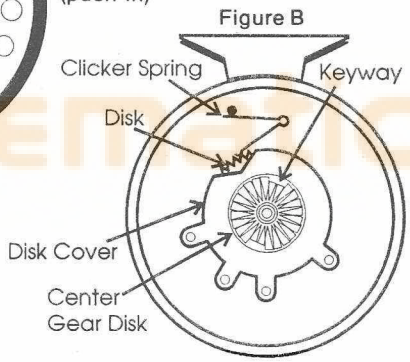

STH REELS (USA) INC.
P.O. Box 500816
Marathon, Florida 33050-0816
Phone (305) 743-5971
Fax (305) 743-3519

Steelhead Argentina S. R. L.
STH REELS
Peru 447
(1067) Buenos Aires
Republica Argentina