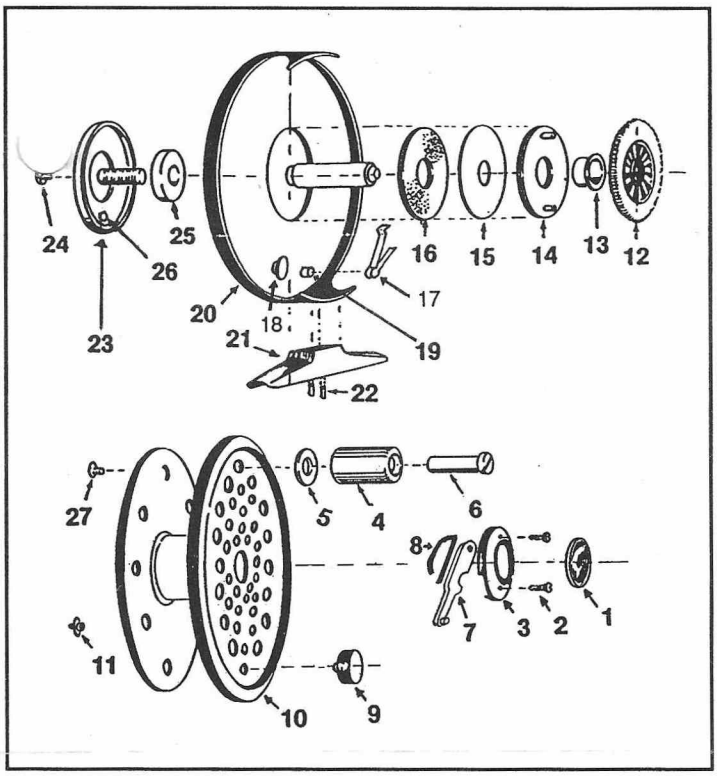


GOLDEN SALT REEL PARTS LIST

1. STH Medallion
2. Sm S.S. Screws (2)
3. Retainer
4. Handle
5. Spacer
6. Handle Rivet
7. Retainer Clip
8. Retainer Spring
9. Counter Weight
10. Spool Housing
11. Stop Pin Assy.
12. Reversible Gear
13. Stainless Breaking Washer
14. Cork Drag Disk on Plate
15. Teflon Drag Disk
16. Cork Drag Disk on Plate
17. Clicker Spring
18. Spring Anchor
19. Spring Stop
20. Reel Frame
21. Reel Foot
22. Foot Dowel Pins
23. Drag Knob
24. Drag Lever Screws
25. Teflon Washer
26. Ball Bearing Detent
27. Handle Screw

OWNER'S MANUAL
GOLDEN SALT REELS

Please take a few minutes to read through this Owner's Manual.

DRAG ADJUSTMENT

The Drag on the Golden Salt Reel is a double compression system which sandwiches a Teflon Disc between two Cork Disks between two stainless steel disks. To adjust Drag, simply move Lever clockwise to increase pressure and counterclockwise to decrease pressure.

TO REMOVE SPOOL

Move spool release lever clockwise and lift spool from shaft. To replace, repeat sequence.

RIGHT OR LEFT HAND CONVERSION

To change to right or left hand use, just follow these steps:

1) Remove spool.
2) Remove gear from center shaft.
3) Flip center gear upside down and replace on shaft.
4) Be sure that holes in center gear line up with studs on Drag Plate.
5) Replace Spool.

ADJUST OUTGOING SOUND

1) Remove spool.
2) Loosen screw on right side of clicker paw.
3) Move toward center shaft to increase, move away for less sound.
4) Tighten screw and replace spool.


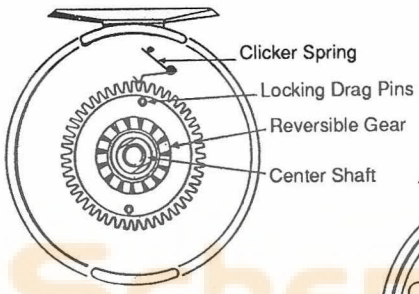


Figure A–Reel Frame

Figure B– Reel Spool



STH REELS (USA) INC.
P.O. Box 500816
Marathon, Florida 33050-0816
Phone (305) 743-5971
Fax (305) 743-3519

Steelhead Argentina S. R. L.
STH REELS
Peru 447
(1067) Buenos Aires
Republica Argentina