
# Replacement LCD Counter
# Scotty HP Electric Downriggers only

1. Place lid upside down on a soft surface.
2. Remove two screws from the sensor holder.
3. Remove counter and sensor holder unit.
4. Flip lid right side up and feed the sensor holder through the lid from the top side.
5. Flip lid upside down again and ensure the gasket is properly located between the sensor holder and the back side of the lid.
6. Take care that the sensor wires are not pinched between the sensor holder and the lid.
7. Only tighten screws hand tight.

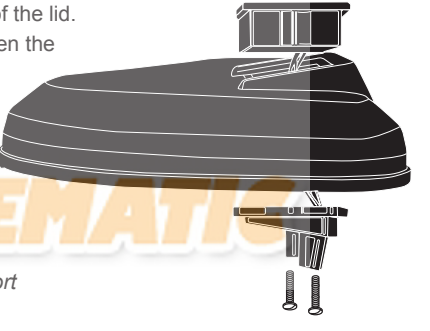

---

1. *Posez le couvercle à l'envers sur une surface lisse.*
2. *Enlevez les deux vis du support du capteur.*
3. *Enlevez le compteur et l'ensemble support-capteur.*
4. *Mettez le couvercle à l'endroit et faites passer le support du capteur à travers le couvercle de par en-dessus.*
5. *Remettez le couvercle à l'envers en veillant à ce que le joint soit bien installé entre le support du capteur et la face inférieure du couvercle.*
6. *Veillez à ce que les fils du capteur ne soient pas pincés entre le support du capteur et le couvercle.*
7. *Revissez les vis en les serrant à la main, sans forcer.*

Scotty Fishing and Marine
Sidney B.C. Canada
www.scotty.com